

ONCE WHITE LED

5000K 120V

LIGHTING DESIGNED FOR ANIMALS

10W, 12W, 15W, 18W



High energy efficiency ~ 110 lm/w



Designed specifically for tough barn settings




Dimmable from 1-100%




Simple 1:1 replacement with E26 fitting

BEAM SPREAD

10W & 12W

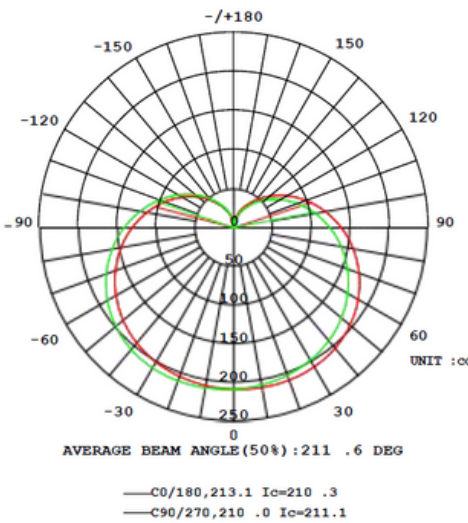

15W & 18W

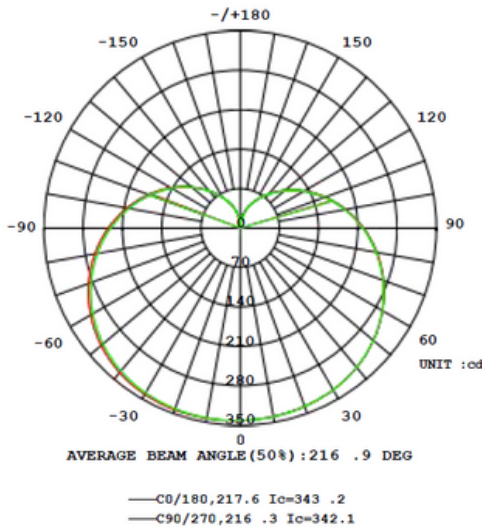

SPECIFICATIONS & ORDERING

Order Code	1000001021	1000001023	1000001026	1000001027	1000001161
	929003965173	929003965175	929003965177	929003965184	929003965393
Nominal power	10W	12W	15W	18W Non-dimmable	18W Dimmable
Luminous flux - human photopic	990lm	1300lm	1650lm	2800lm	2400lm
Initial LED - luminaire efficacy	110 lm/W	110 lm/W	110 lm/W	160 lm/w	133 lm/w
Input voltage	120V				
Input frequency	60 hz				
Driver included	Yes				
Surge protection	2.5kV				
Power consumption tolerance	10%				
Power factor	0.8				
Beam angle	150 Degrees	150 Degrees	165 Degrees	165 Degrees	165 Degrees
Warranty period	3 years				
HS code	8539520010				
Spectral Output and Dimming Specifications					
Dimmable	Yes, 1-100%	Yes, 1-100%	Yes, 1-100%	No	Yes, 1-100%
Spectral output	5000K				
Operating and Mechanical Specifications					
Operating temperature	-10°C to 40°C / 14°F to 104°F				
Rated life	L70, 25k hours				
Lens material	PC				
Housing material	PA				
Diameter	60 mm	60 mm	77 mm	77 mm	
Height	116 mm	116 mm	139 mm	139 mm	
Length	60 mm	60 mm	77 mm	77 mm	
Width	60 mm	60 mm	77 mm	77 mm	
Mount/adaptor & connection	E26 socket				
Control interface	Trailing edge dimming				
Product weight per piece	80g /0.176lbs	80g /0.176lbs	100g / 0.203lbs	100g / 0.203lbs	
Safety and certifications					
RoHS Compliant	Yes				
ANSI/UL	cULus				
IK and IP Rating	IK03 and IP65				

