

## AgriShift MLB 120V EB Gen 3



- *Promotes early weight gain*
- *Low-profile, wide beam angle*
- *Advanced system specialized for poultry*
- *14 W LED equivalent to 100W incandescent*
- *Enhances animal welfare*
- *Built for Barn, durability and robustness to withstand pressure washing and dirt*
- *Ease of installation*

## Introduce your poultry to animal-centric lighting

The third generation AgriShift MLB fixture for broiler and turkey operations features a brighter, longer lasting and more rugged design that is less sensitive to power fluctuations. It is fully sealed against moisture and is made with species-specific, Dim-to-Blue technology. It offers an optimized color spectrum and full dimming capability, allowing producers to enhance production by controlling

photoperiod and light intensity throughout the entire life cycle of the bird.

With an AgriShift Control or Dim, and a ONCE recommended lighting program, producers can improve bird weight, flock uniformity and feed conversion rates.

# Specifications and Ordering

## AgriShift MLB 120V EB GEN 3 Specifications

Nominal power	14 W
Luminous flux - human photopic	1400 lm
Luminous flux - animal photopic	-
Luminous Flux Melanopic	-
Initial LED luminaire efficacy	100 lm/W
Input voltage	120VAC
Input frequency	60 Hz
Driver included	Yes
Protection	MOV/FUSE
Power consumption tolerance	+/-10%
Power factor	0.98
Beam angle	Very Wide
Beam spread	Dual asymmetric
Driver failure rate at 50k hrs	<5%
Warranty period	5 years
Recyclable	No
HS code	8539.52.0091
Country of origin	Peoples Republic of China

## Spectral Output and Dimming Specifications

Dimmable	Yes
Dimmable range	100% to 1%
Colour temperature (K)	4500k

## Operating and Mechanical Specifications


Operating temperature	-20°C to 40°C / -4°F to 104°F
Lumen maintenance L70B50 [h]	>50,000 hours
Lens material	PC
Housing material	PC/AL
Diameter	87.5mm
Height	167mm
Length	-
Width	-
Mount / Adaptor	E26 Edison Base
Connection	E26 Medium Edison Base
Control interface	Phase cut
Product weight per piece	0.318kg/0.70Lbs

## Safety and Certifications

CE mark	No
RoHS compliant	Yes
ANSI/UL	Yes
Can/CSA STD C22.2 NO 250.0	Yes
CB	-
Flammability mark	-
IEC protection class	Self ballasted lamp
IK impact rating	IK07
IP code	IP66

## Ordering Information

Description	SKU
MLB 1400/WB20 120V EB/T VWB Gen 3	1000000490
MLB 1400/WB20 120V JB/T VWB Gen 3	1000000885
MLB 1400/WB20 120V JJ/T VWB Gen 3	1000000886
MLB 1400/WB20 120V HW/T VWB Gen 3	1000000887

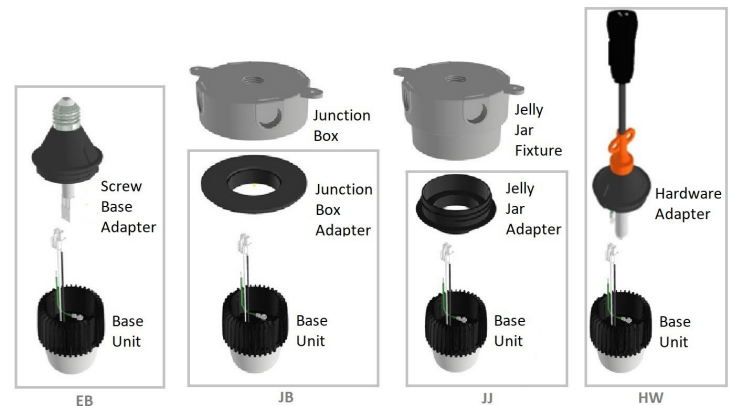

Contact us

or learn more at:

[www.once.lighting](http://www.once.lighting)

3955 Annapolis Ave N, Suite 100

Plymouth, MN 55447

United States of America

P +1 (763) 381-5621

[info@onceteam.com](mailto:info@onceteam.com)

Am Südfeld 7

49377 Vechta

Germany

P +49 (0) 4441-8898-10

[info.germany@onceteam.com](mailto:info.germany@onceteam.com)

**once**  
by  **signify**

© 2021 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Revised 5/2021 Data subject to change