

# Multi-Adapter Light Mini for Swine (MLM-S)

## Animal Lighting



Brighter and more durable design



Low-profile, wide beam angle




1-100% dimming reduces stress and improves welfare

### ABOUT

MLM-S has a Built For Your Barn design and is suitable for use in sow barns, gestation buildings, nurseries, gilt development units and finishing facilities. It has a modular build and allows for easy installation with a retrofit solution that helps eliminate constant replacement cycles. Product shown with junction box (JB) not included.

### ADAPTERS

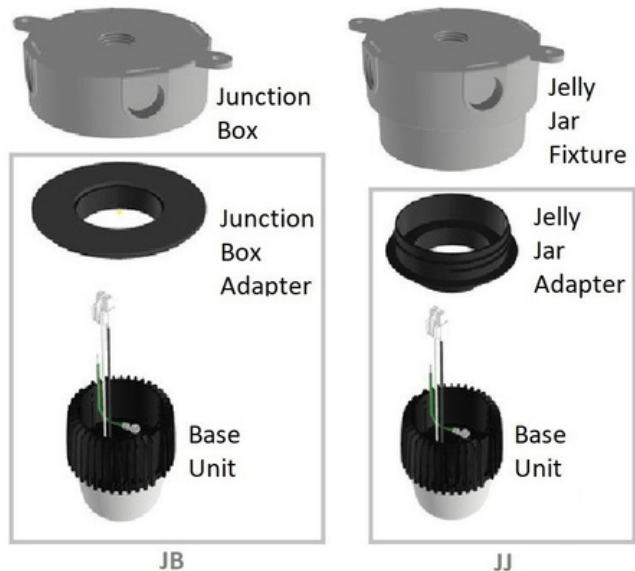

# SPECIFICATIONS & ORDERING

Order code	1000001829
Description	MLM-S 120V WH 5000K 10W
Nominal power	10W
Input voltage	120 VAC
Luminous Flux-Human Photopic	1200 lm
Initial LED luminaire efficacy	120 lm/W
Input frequency	60 Hz
Driver Included	Yes
Surge Protection	MOV/FUSE
Power Consumption Tolerance	+/- 10%
Power Factor	.98
Beam Angle	Very Wide
Country of Origin	China
Warranty Period	5 years
HS Code	8539520091
Spectral Output, Dimming, and Mechanical Specifications	
Dimmable	Yes
Spectral Output	5000K
Dimmable range	0-100%
Operating temperature	-20°C to 40°C / -4°F to 104°F
Rated Life	>50,000 hours
Housing and Lens Material	PC/AL
Diameter	86mm
Length	82.5mm
Mount/Adaptor	JB, Drop cord
Connection	Junction box: 3 pole terminals, Stringer: pre-configured cables
Control Interface	Phase cut
Product weight per piece	0.152kg/0.335Lbs
Safety and Certifications	
RoHS Compliant	Yes
ANSI/UL	Yes
Can/CSA STD C22.2 NO 250.0	Yes
NEMA 4X	Yes
IEC protection class	Class I
IP code	IP66
IK impact rating	IK07