

ONCE WHITE LED

5000K 120V

LIGHTING DESIGNED FOR ANIMALS

10W, 12W, 15W, 18W



High energy efficiency ~ 110 lm/w



Designed for tough barn environments




Dimmable from 1-100%




Simple 1:1 replacement with E26 fitting

BEAM SPREAD

10W & 12W

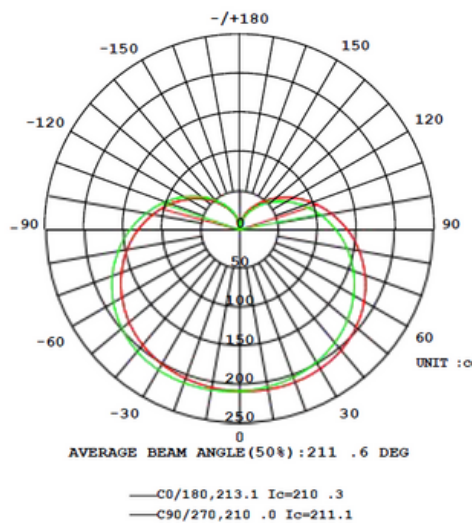


15W & 18W

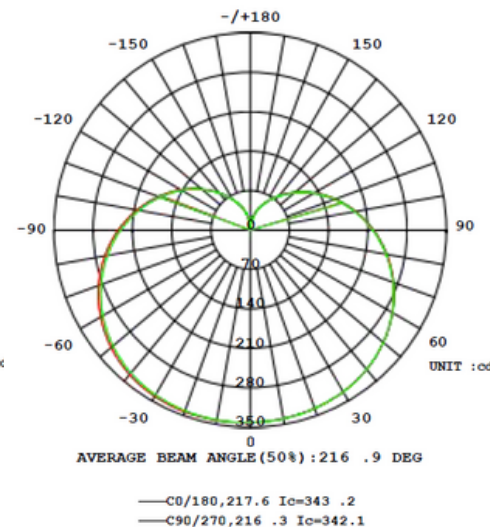

SPECIFICATIONS & ORDERING

Order Code	1000001021	1000001023	1000001026	1000001027
	929003965173	929003965175	929003965177	929003965184
Nominal power	10W	12W	15W	18W
Luminous flux - human photopic	990lm	1300	1650	2800
Initial LED - luminaire efficacy	110 lm/W	110 lm/W	110 lm/W	160 lm/w
Input voltage	120V			
Input frequency	60 hz			
Driver included	Yes			
Surge protection	2.5kV			
Power consumption tolerance	10%			
Power factor	0.8			
Beam angle	150 Degrees	150 Degrees	165 Degrees	165 Degrees
Warranty period	3 years			
HS code	8539520010			
Spectral Output and Dimming Specifications				
Dimmable	Yes, 1-100%	Yes, 1-100%	Yes, 1-100%	No
Spectral output	5000K			
Operating and Mechanical Specifications				
Operating temperature	-10°C to 40°C / 14°F to 104°F			
Rated life	L70, 25k hours			
Lens material	PC			
Housing material	PA			
Diameter	60 mm	60 mm	77 mm	77 mm
Height	116 mm	116 mm	139 mm	139 mm
Length	60 mm	60 mm	77 mm	77 mm
Width	60 mm	60 mm	77 mm	77 mm
Mount/adaptor & connection	E26 socket			
Control interface	Trailing edge dimming			
Product weight per piece	80g /0.176lbs	80g /0.176lbs	100g / 0.203lbs	100g / 0.203lbs
Safety and certifications				
RoHS Compliant	Yes			
ANSI/UL	cULus			
IK and IP Rating	IK03 and IP65			

Questions



Questions?

